


Shenzhen Greatpro Technology Co., Ltd

Add:4th Floor, Building 87, Zhangkeng 2 area, Mingzhi Street, Longhua New District, Shenzhen, China
Mobile:86 - 135 2848 3640 Skype:sunny@greatpro.com.cn Email:sunny@greatpro.com.cn Contact: Sunny Xu
Website: www.greatpro.com.cn

Date:5th, Apr, 2017




Greatpro offers complete indoor Bluetooth BLE solutions for indoor navigation with beacon tag hardware and open interface to support any indoor navigation deployment. We offer stand-alone tags and services or complete professional services, engineering, and custom beacon tag designs. You can do everything you want to without any limit of us. For the development documents matters, please contact us.

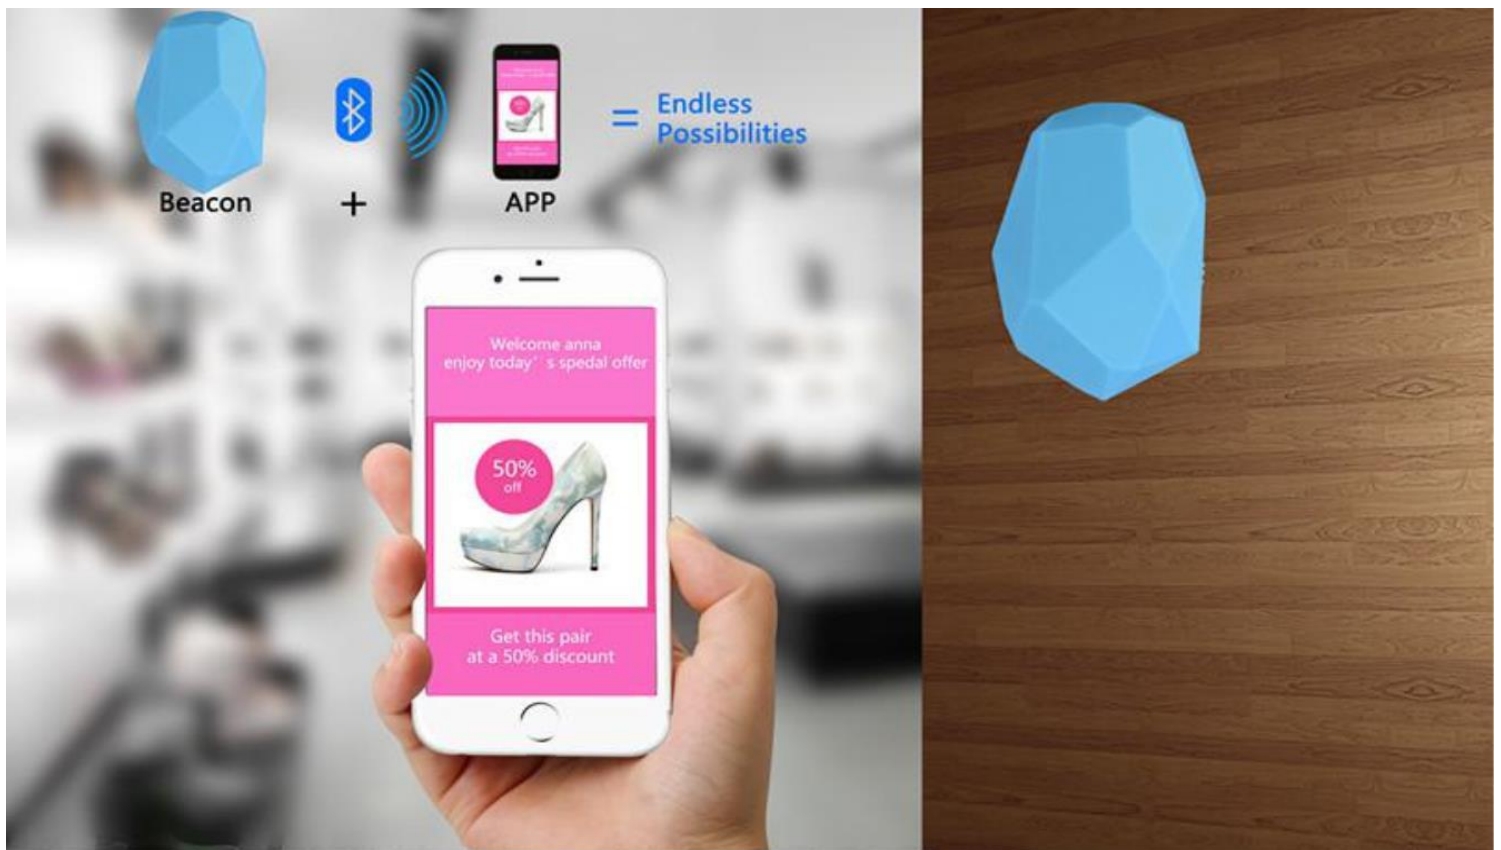

Products Details

iBeacon can work as an independent system, and lithium batteries supply power for these models. It has 3 different working modes, sleep mode, connectable mode and non-connectable mode. For developers, we provide the Android and IOS SDK, and all the interface developed completely by us, all of the parameters can be reconfigured, including Proximity UUID, Major, Minor and Power. In order to meet different customers' needs, interval rate can also be configured, which ranges from 0-1600. Besides, hardware TX power can be configured, and configurable range is 4 dBm to -23 dBm. Low cost customizing housing would be provided to potential customers.

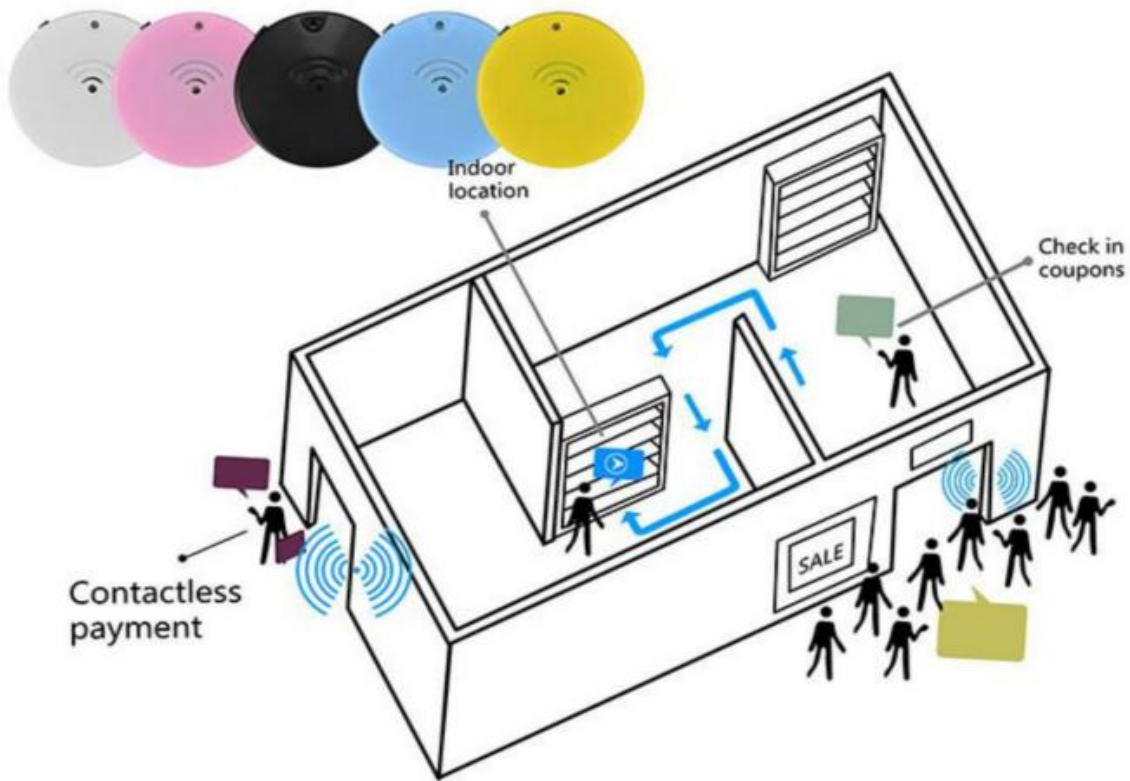

QUOTATION SHEET

MODEL NO.	PICTURE	QUANTITY(PC S)	UNIT PRICE EXW (USD)	SPECIFICATION
forecum 200		Sample	6 usd/pcs 1.+accelerometer +1USD 2.+temperature and humidity sensor +2.5 USD	Support iBeacon & Eddystone features Chipset: Ti CC 2541/ Nordic 51822 256KB Support BLE4.0 protocol Support to broadcast at most 3 types of different data simultaneously MCU: ARM Cortex M0 Memory (RAM): 16KB Side Pins for debugging: VCC, GND,TMS, TCK Ti Connect: CCDUBEEGE Nordic Connect: J-link Bluetooth range: 50m in open air Precision Relative Humidity Sensor $\pm 3\%$ RH (max), 0–80% RH High Accuracy Temperature Sensor ± 0.4 °C (max), –10 to 85 °C Accelerometer chip: LIS331DLH TX Power: -23dBm, -6dBm, 0dBm, +4dBm in 4 steps Application: iOS7.0 above & Android 4.3 above with tool APP&SDK Function: Broadcast information, indoor location Color: white, black, pink, blue, yellow, or colors could be customized battery life: 12 months based on broadcasting rate 1second Accessories: 1* housing 1* 3M sticker 1* CR2032 battery Certificate: CE ROHS FCC Size: 29mm(D)*7mm(T) Weight: 6.6g

forecum 200 wristband



Sample

7 usd/pcs


1.+accelerometer +1USD

2.+temperature and humidity sensor +2.5 USD

**Support iBeacon & Eddystone features
Chipset: Ti CC 2541/ Nordic 51822 256KB**

Support BLE4.0 protocol
Support to broadcast at most 3 types of different data simultaneously
MCU: ARM Cortex M0
Memory (RAM): 16KB
Side Pins for debugging: VCC, GND, TMS, TCK
Ti Connect: CCDUBEEGE
Nordic Connect: J-link
Bluetooth range: 50m in open air
Precision Relative Humidity Sensor $\pm 3\%$ RH (max), 0–80% RH
High Accuracy Temperature Sensor ± 0.4 °C (max), –10 to 85 °C
Accelerometer chip: LIS331DLH
TX Power: -23dBm, -6dBm, 0dBm, +4dBm in 4 steps
Application: iOS7.0 above & Android 4.3 above with tool APP&SDK
Function: Broadcast information, indoor location
Color: white, black, pink, blue, yellow, or colors could be customized
battery life: 12 months based on broadcasting rate 1second
Accessories:
1* wristband
1* CR2032 battery
Certificate: CE ROHS FCC
Size: 24cm(L)*2.4cm(W)*0.3cm(T)
Weight: 31.3g

forecum 201 Waterproof

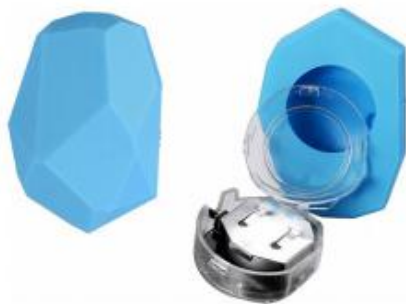

Sample

8 usd/pcs

1.+accelerometer +1USD

2.+temperature and humidity sensor +2.5 USD

**Support iBeacon & Eddystone features
Chipset: Ti CC 2541/ Nordic 51822 256KB**

Support BLE4.0 protocol
Support to broadcast at most 3 types of different data simultaneously
MCU: ARM Cortex M0
Memory (RAM): 16KB
Side Pins for debugging: VCC, GND, TMS, TCK
Ti Connect: CCDUBEEGE
Nordic Connect: J-link
Bluetooth range: 100m in open air
Precision Relative Humidity Sensor $\pm 3\%$ RH (max), 0–80% RH
High Accuracy Temperature Sensor ± 0.4 °C (max), –10 to 85 °C
Accelerometer chip: LIS331DLH
TX Power: -23dBm, -6dBm, 0dBm, +4dBm in 4 steps
Application: iOS7.0 above & Android 4.3 above with tool APP&SDK
Function: Broadcast information, indoor location
Color: orange blue, or colors could be customized
battery life: 24 months based on broadcasting rate 1second
Accessories:
1* waterproof case
1* 3M sticker,
1* CR2477 battery
Certificate: CE ROHS FCC
Size: 4.2cm*6cm*2cm
Weight: 40g

HV 104 Rechargeable

Support iBeacon features

	Sample	8 usd/pcs	<p>Chipset: Ti CC 2541 Support BLE4.0 protocol Support to broadcast at most 3 types of different data simultaneously Ti Connect: CCDUBEEGE Bluetooth range: 50m in open air TX Power: -23dBm, -6dBm, 0dBm, +4dBm in 4 steps Application: iOS7.0 above & Android 4.3 above with tool APP&SDK Function: Broadcast information, indoor location Color: white, black, pink, blue, yellow, or colors could be customized battery life: 15 days based on broadcasting rate 1second</p> <p>Accessories: 1* Housing 1* Pendant 1* USB cable Certificate: CE ROHS FCC Size: 40mm(D)*14mm(T) Weight: 9.5g</p>
<p>HF-300 USB adapter or 2 pcs AA bateries</p> 	Sample	8 usd/pcs	<p>Support iBeacon features Chipset: Ti CC 2541 Support BLE4.0 protocol Support to broadcast at most 3 types of different data simultaneously Ti Connect: CCDUBEEGE Bluetooth range: 150m in open air TX Power: -23dBm, -6dBm, 0dBm, +4dBm in 4 steps Application: iOS7.0 above & Android 4.3 above with tool APP&SDK Function: Broadcast information, indoor location Color: white, or colors could be customized battery life: 24 months based on broadcasting rate 1second by AA battery OR charging by USB cable directly</p> <p>Accessories: 1* housing 1* USB cable 5* screw Certificate: CE ROHS FCC Size: 72mm*50mm*21mm Weight: 9.5g</p>

Notes

1. Payment terms: 30% deposit T/T in advance, balance 70% before shipment
2. Lead time: 7-15 days after prepayment received
3. Quotation valid time: 7 days
4. Warranty: 1year